

بسم الله الرحمن الرحيم



(1) ماكينة لحام 160 أمبير يدويه + عده موديل : NGBX160
Machine BX6-160-2 Welding



(2) ماكينة لحام 250 أمبير + عده موديل : NGBX250
Machine BX1-250-2 Welding



(3) ماكينة لحام 300 أمبير + عده موديل : NGBX300
Machine BX1-300-2 Welding



(4) ماكينة لحام 400 أمبير + عده موديل : NGBX400
Machine BX1-400-2 Welding



(5) ماكينة لحام 500 أمبير + عده موديل : NGBX500
Machine BX1-500-2 Welding




(6) موديل: NGBZ125
ماكينة لحام متناوب التيار (INVERTER) A 125 -10
Machine ZX7-125 Welding



(7) موديل : NGBZ200
ماكينة لحام متناوب التيار (INVERTER) A 200 - 10
Machine ZX7-200 Welding



(8) موديل : NGBLG
ماكينة قص بلازما على الهواء 12 mm
Machine LG 40 Welding

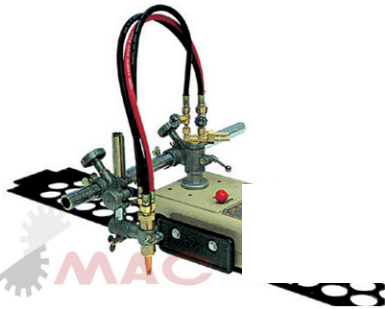

(9) موديل : NGBMAC
ماكينة قص دائرية وزاوية وشكل V للحديد من 8 - 100 mm
Machine GCM 001 Welding

Type: BX1-250
Input Power: Single-phase ,380V,50Hz
Amount input capacity: 32KVA
Amount export current: 400A
Amount output voltage: 36V
Export current range: 80-400A
Unloaded voltage amount: 76V
Lasting rate of specified load: 40%
Cooling Way: Cold (air-cooled)
Weight(kg): 135
Dimension(mm): 560*390*600

Type: BX1-300
Input Power: Single-phase,380V,50Hz
Amount input capacity: 32KVA
Amount exports electric current: 400A
Amount outputs the voltage: 36V
Export electric current range: 80-400A
Unloaded voltage of amount:76V
Lasting rate of specified load:40%
Cooling Way Cold:(air-cooled)
Weight(kg):135
Dimension(mm):560*390*600

Type: BX1-400
Input Power: Single-phase, 380V, 50Hz
Amount inputs the capacity: 32KVA
Amount exports the electric current: 400A Amount
Outputs the voltage: 36V
Export the electric current range: 80-400A Unloaded
Voltage of amount: 76V
Lasting rate of specified load: 40%
Cooling Way Cold: (air-cooled)
Weight (kg): 135
Dimension (mm): 560*390*600

Type: BX1-500
Input Power: Single-phase ,380V,50Hz
Amount input: the capacity 32KVA
Amount export: the electric current 400A

Amount output: the voltage 36V
Export the electric current range: 80-400A
Unloaded voltage of amount: 76V
Lasting rate of specified load: 40%
Cooling Way: Cold (air-cooled)
Weight(kg):135


YOUSSEF AKLOUK CO.

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

مضخات مياه ومعدات ميكانيكية
وصناعية ولوازم الكراجات
٤٩٠٣٧٤٦-٤٩٠٣٤٦١ : ☎
+٩٦٢ ٦ ٤٩٠٣١٢٤ : 📠
١١١٨١ عمان ٨١١٨٣٤ : ✉
شارع المحطة - مثلث النشأ
E-mail: acc@aklouk.com
www.aklouk.com
عمان - الأردن

Type: LG-40

Voltage of the power 220V±10%;50Hz

Input current: 22.7A

Amount exports current: 40A

Electric current regulates range: 10-40A

Unloaded voltage: 220V-260V

Lasting rate of specified load: 60%

Working way: Contact-type

Air pressure: 0.2-0.4MPa

Cutting thickness: 12mm

**Time of stagnation of the circulation of vital energy:
5S**

Dimension£(mm): 373*153*285

Type : ZX7-125

Power Source :Single-phase , 380V , 50Hz

Rated Input Capacitance :4KVA

Current adjusting range:10-125V

Weight (kg):7 kg

Dimension (mm):350*270*180

Type :ZX7-200

Input Power : three-phase , 380V , 50Hz

Rated Input Capacitance : 7KVA

Current adjusting range : 10-200V

Rated open Voltage : 70V

Rated Loading duration : 60%

Weight(kg) : 18 kg

Dimension(mm) : 425*195*310

Type: BX6-160-2

Input the power: Single-phase,220V/380V,50Hz

Amount inputs the capacity: 9KVA

Amount inputs the capacity: 160A

Amount outputs the voltage: 26V

Export the electric current range: 60/120/160A

Unloaded voltage of amount: 46-48V

Lasting rate of specified load: 10%

Cooling way: Since it is cold(Air-cooled)

Weight(kg): 20

Size of appearance(mm): 390*250*235